




SCRUB SINKS DECONTAMINATION STATIONS

Engineered for a Lifetime — Our Reputation is Stainless

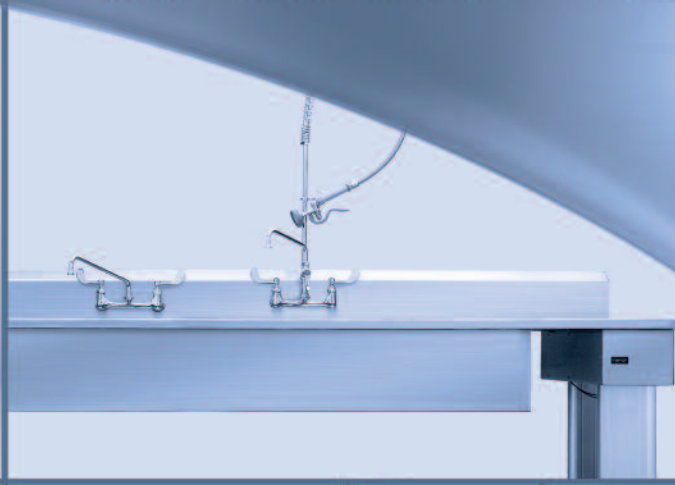

**BLICKMAN
BUILT™**

SCRUB SINKS
DECONTAMINATION STATIONS



DECONTAMINATION STATIONS

Choose Blickman's new Decontamination Stations for optimal infection control. Blickman has the equipment you need to ensure infection control in today's high-risk healthcare environments. Our durable stainless steel decontamination stations meet the stringent AAMI (Association for the Advancement of Medical Instrumentation) guidelines for maximum sterility and utility. Model DSBC offers:


- AAMI-recommended three-bowl functionality
- Ergonomic, 37" working height (Hydraulic units 33-40" range)
- Adjustable levelers on base of cabinets
- Unique, "no-drip" sink lip
- Integrally-welded, 16 gauge cove-cornered stainless steel bowls with pitched bottoms for proper drainage
- Permanently etched gallon and liter calibration inside each bowl for precise measurement
- Pre-rinsed combination faucet
- Wall-mounted faucet with 12" swing and 4" wrist blade handles
- Wall-mounted air, gas and VAC valve with serrated barbed-end hose (installed separately)
- 3-bowl, 25" x 18" x 10" deep
- 8" backsplash
- 110 volts

Blickman's symmetrical design can be arranged for either left or right workflow.

18" counter space is provided on both sides of the sink array.

The sinks allow full immersion of surgical instrument trays. Choose either the DSBC (shown with base cabinets), or the DSHB (shown with legs and cross bracing), or the DSHY (shown with hydraulic adjustable height legs).

**Consult factory for customization:
1-800-247-5070**

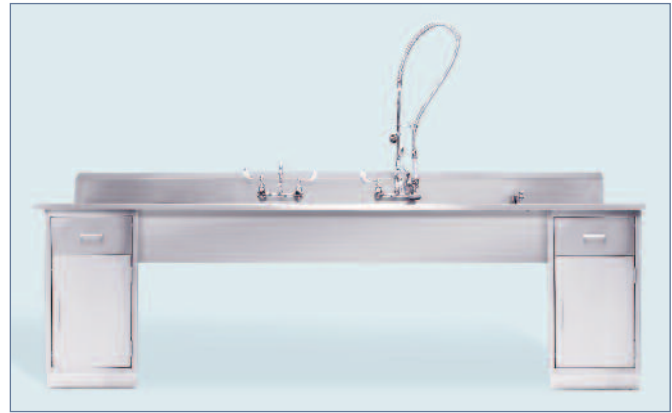

Model DSBC with base cabinets

Model No.	Part No.	Length	Depth	Height
DSBC	161DSBC001	116"	25"	37"



Model DSHB with stainless steel legs and cross bracing offers the same features as the DSBC but is available with legs and cross bracing.

Model No.	Part No.	Length	Depth	Height
DSHB	161DSHB001	116"	25"	37"



Model DSHY 3-compartment decontamination station with hydraulic leg lift, ergonomic height adjustment and anchorable base, 120V AC

Model No.	Part No.	Length	Depth	Height
DSHY	161DSHY001	116"	25"	33-40"



SCRUB SINKS







CONSTRUCTION

9800 Series Lodi Scrub Sinks are built with seamless construction with 1" (2.54) covered corners. Bowls are 9-1/2" (23.268) deep at rim and 23-1/2" (59.69) from spout to drain allowing for a deep scrub area. The spout is positioned toward the rear of the sink to divert water splash away from the operator. Undersides of the bowl are sound-deadened and enclosed by double walled panels.

Each sink is equipped with an electronic infrared sensor for water and knee-activated water and soap dispenser.

Base extends 21" (53.34) from the basin and hangs 13-3/4" (34.92) from finished floor. May require optional chair carrier. Refer to installation manual. Sinks provide scrub areas approximately 30" (76.20) wide x 18-1/2" (46.99) deep, each sink is equipped with its own deck-mounted surgical bend gooseneck with laminar flow device; adjustable thermostatic mixing valve, 2-stage filtration system with control module EC-filter and check valve filter screens. Energy saver Hydro-Generator, flow control valve and stainless steel waste outlet and 1-1/2" x 8" (3.81 x 20.32) tailpiece.

BLICKMAN 9800 SERIES SCRUB SINKS

	Model No.	Mounting	Controls	Part No.	Width	Depth	Height	# Places	Options
	9881SSP	Pedestal	Infrared water and knee activated water & soap	1339881P00	32" (81.28)	27-1/4" (69.21)	53" (134.62)	1	Eyewash Digital Scrub Timer No Soap
	9881SSW	Wall Mount	Infrared water and knee activated water & soap	1339881W00	32" (81.28)	27-1/4" (69.21)	39-1/4" (99.69)	1	Eyewash Digital Scrub Timer No Soap In-wall Chair Carrier (Required)
	9882SSP	Pedestal	Infrared water and knee activated water & soap	1339882P00	64" (162.56)	27-1/4" (69.21)	53" (134.62)	2	Eyewash Digital Scrub Timer No Soap
	9882SSW	Wall Mount	Infrared water and knee activated water & soap	1339882W00	64" (162.56)	27-1/4" (69.21)	39-1/4" (99.69)	2	Eyewash Digital Scrub Timer No Soap In-wall Chair Carrier (Required)
	9883SSP	Pedestal	Infrared water and knee activated water & soap	1339883P00	96" (243.84)	27-1/4" (69.21)	53" (134.62)	3	Eyewash Digital Scrub Timer No Soap
	9883SSW	Wall	Infrared water and knee activated water & soap	1339883W00	96" (243.84)	27-1/4" (69.21)	39-1/4" (99.69)	3	Eyewash Digital Scrub Timer No Soap In-wall Chair Carrier (Required)

Note: Metric dimensions are shown in centimeters. Specifications may be improved and dimensions changed without prior notice.



Windsor Scrub Sinks: Blickman Windsor Scrub Sinks include an 8" deep bowl and 22" scrub area with gooseneck faucet splash mounted to the back sink panel.

All welded seamless construction and coved corners mean easy cleaning; no crevices for dirt to collect.

Choose knee-action or infrared sensor controls; knee-action will be provided unless specified. Available in single, double, triple, or four-place sink units. Optional foot or elbow controls are available.



Model No.	Controls	Part No.	Width	Depth	No. places
7878SS	Knee-action	1317878000	25" (63.50)	18.5" (46.99)	1
7878SS-IF	Infrared	1317878001	25" (63.50)	18.5" (46.99)	1
7879SS	Knee-action	1317879000	47" (119.38)	18.5" (46.99)	2
7879SS-IF	Infrared	1317879001	47" (119.38)	18.5" (46.99)	2
7880SS	Knee-action	1317880000	69" (175.26)	18.5" (46.99)	3
7880SS-IF	Infrared	1317880001	69" (175.26)	18.5" (46.99)	3
7881SS	Knee-action	1317881000	91" (231.14)	18.5" (46.99)	4
7881SS-IF	Infrared	1317881001	91" (231.14)	18.5" (46.99)	4

Note: Metric dimensions are shown in centimeters.

Specifications may be improved and dimensions changed without prior notice.

Welding: All welding is accomplished by heli-arc method. All exposed welds ground smooth.

Finish: All exposed stainless steel surfaces are free from pit marks, weld seams and scale, and polished to a No. 4 satin finish.



* Items can be shipped via FedEx® Ground delivery service.



500 US Highway 46 East, Clifton, NJ 07011 • 800-247-5070 • Fax: 973-330-0594
 e-mail: info@blickman.com • www.blickman.com